

CoaXPress Range Extender over Fiber (SFP+)

Overview

KAYA Instruments' CoaXPress Range Extender over Fiber is industry's first CXP range extender which provides a high resolution stream interface for distances up to 10km in single-mode and up to 400m in multi-mode. Optic fiber is electrically isolated, hence it does not radiate nor is it susceptible to electromagnetic interference, also eliminates the problems associated with grounding. The fiber cable is not easily tapped, providing more secure communication. The system is constructed of two converters, one on the camera side and one on the host side. The converter on the camera side can provide power to the camera over CoaXPress link, while the converter on the host side can sink power from the frame grabber. The converters use flexible SFP+ modules for optical connection that can be easily changed. The range extender is able to provide an uplink of up to 6.25Gbps and downlink at 20.83Mbps.

Features

- Coaxpress V1.1 compatible
- Solves distance limitation of CoaXPress
- Downlink/Uplink of 6.25 Gbps and 20.83 Mbps respectively
- Extension for distances up to 10km in single-mode and up to 400m in multi-mode
- Bidirectional CoaXPress communication
- Flexible SFP+ module for Fiber connection
- DIN rail mounting (optional)
- DIN 1.0/2.3 connectors for CoaXPress links
- Plug and Play , no need to configure
- Power over CoaXPress support
- 0°C to 50°C operating environment temperature




Applications

- ✓ High speed cameras
- ✓ High definition cameras
- ✓ Panoramic cameras
- ✓ Defense remote systems
- ✓ Surveillance
- ✓ Robotic Vision

Deliverables

- Host and device converters
- SFP+ modules
- Power supply (24V 2.7A PSE)
- Hardware user manual
- Coax cables (optional)
- Fiber cables (optional)

System Block Diagram

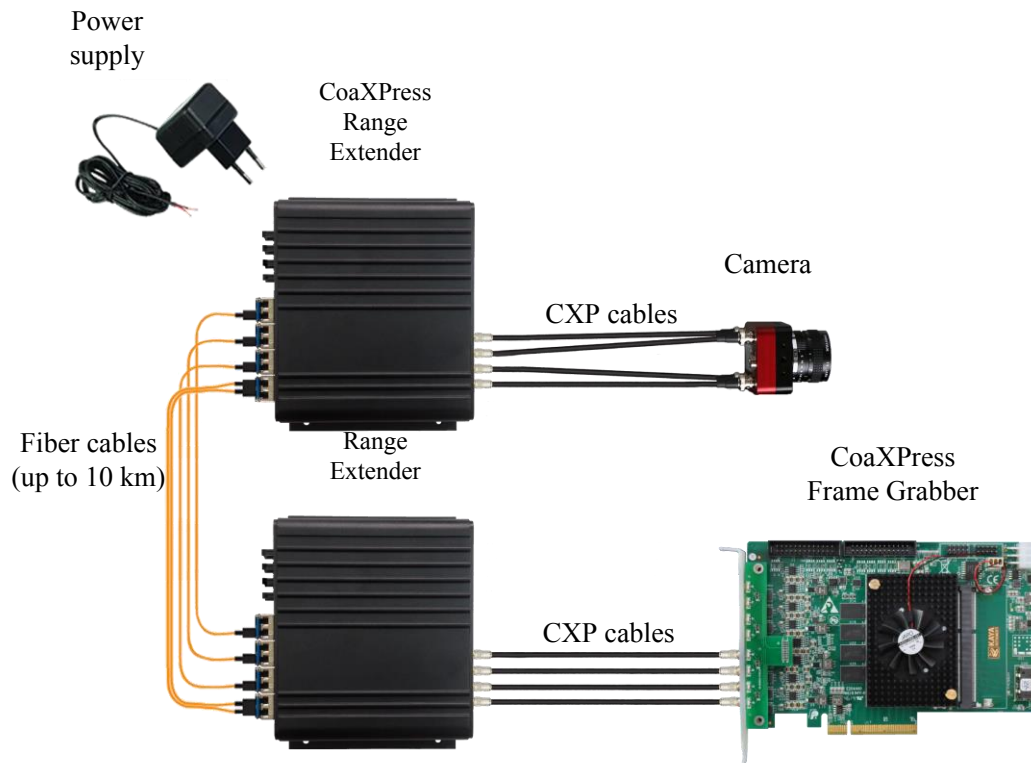

* 発注型番	内容
KY-EXT-F4-SM	CoaXPress レンジエクステンダ Single mode 4ch
KY-EXT-F4-MM	CoaXPress レンジエクステンダ Multi mode 4ch

- * 製品に含まれるもの
- カメラ側エクステンダユニット
 - ホスト側エクステンダユニット
 - カメラ側ユニット用 24V電源
 - SMまたはMMの SFP+モジュール (合計8個)

 **立野電腦** EXT営業部
E-mail : sales@dsp-tdi.com

〒198-0063 東京都青梅市梅郷5-955 TEL.0428-77-7000 FAX.0428-77-7010

URL <http://www.dsp-tdi.com/>